




PARTS LIST AND INSTRUCTIONS



Wheel Horse

WHEELHORSE PRODUCTS, INC. • SOUTH BEND, IND.

DUAL WHEEL KIT MODEL 8-0711 (Formerly DW-62)

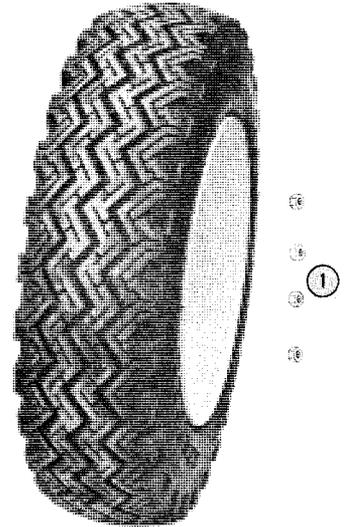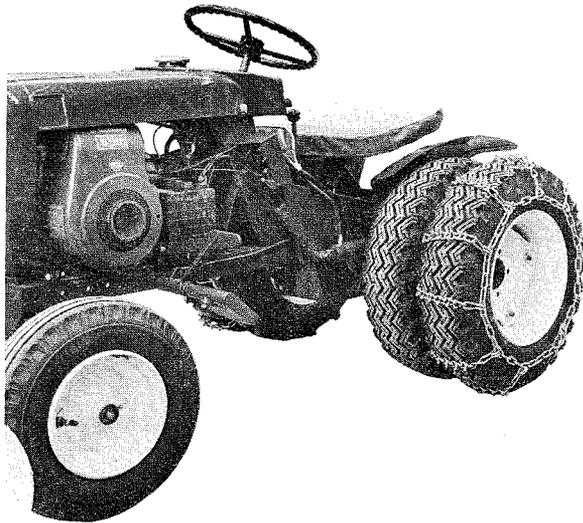

ASSEMBLY

Check wheel bolts securing your present wheel assembly to the wheel hub. Tighten securely. Then, place the four $\frac{1}{2} \times 7\frac{1}{2}$ " carriage bolts through the 4 square holes in wheel disc on the tractor from the inside out. Add the adaptor assembly and the second wheel. Secure with the four lock nuts provided. Re-check periodically after use. Bolts must be tightened securely.

GENERAL

Kit provides spacers and bolts with which a second or dual wheel may be added to each rear wheel assembly on Wheel Horse tractors. Dual rear wheels provide additional floatation and traction.

One or two sets of chains may be used in conjunction with the dual wheels.

Tire and rim assemblies should be secured from your local dealer to match the tires on your tractor.

Both all purpose, and cleat type tires may be used with the attachment.

NOTE: When dual wheels are used, wheel weights cannot be used. If additional rear weight is required, the tires should be filled with liquid.

PARTS LIST

To be used with Wheel Assy's 1665, 1666, 1667

| Ref. No. | Part No. | Name | Quantity |
|----------|----------|--|----------|
| 1 | 1410 | Nylock Nut $\frac{1}{2}$ -13 | 8 |
| 2 | 1762 | Adaptor Ass'y. W/A | 2 |
| 3 | 127107 | Carriage Bolt $\frac{1}{2}$ -13 x $7\frac{1}{2}$ | 8 |

Extra Wheel assembly to be secured from your dealer to match tires on your tractor.